


MODEL XV-2020

Bar Code Exit Pass Verifier

**BARCODE MACHINE READABLE
EXIT PASS VERIFIER
Model XV-2020**

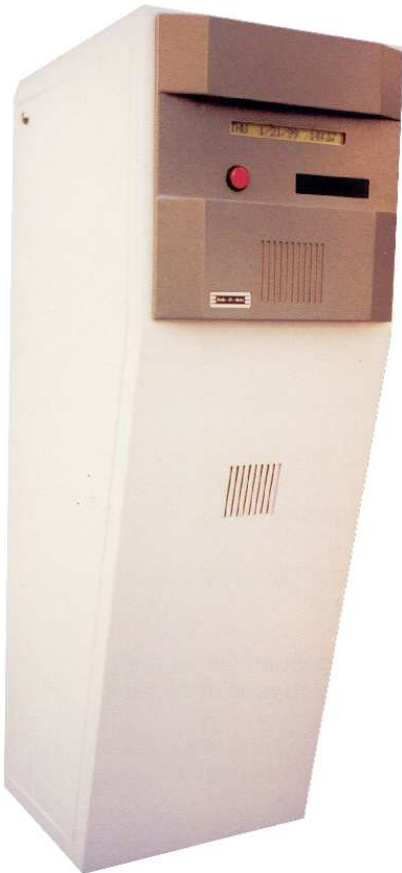

Model XV-2020 Ticket Verifier

FEATURES:

- Safe, 24VDC low voltage operation
- Optional Internal Batteries allow for operation during power interruptions
- Rugged rust-resistant zinc plated steel construction.
- Built-In thermostatically controlled heaters.
- Large back-lit LCD displays Date & Time, and optional programmable message.
- Optional built-in intercom
- On-Line or Off-Line Operation capable
- Accepts 4 or 7 mil thick tickets, or pass cards
- Direct interface to the Controller Series II family of Revenue control equipment.
- Interface to all types of Barrier gates.
- Optional stand-alone operation



ENGINEERED PARKING SYSTEMS


25010 AVENUE TIBBITTS, VALENCIA, CA 91355
PHONE (661) 294-0778 (800) EPSINFO (377-4636) FAX (661) 294-0674
www.epsinfo.com

I. Purpose:
The **EPS** Model XV-2020 Exit Verifier is a revenue control device that provides a "vend" signal when a ticket is read and accepted for exit. This "vend" signal causes a lift-arm barrier gate to activate, and allow egress from the facility.

II. Features & Functions:
A. The **EPS** Model XV-2020 Exit Verifier is designed to accept and interpret an exit ticket obtained from a Central Cashier Fee Computer to permit a parking patron to exit the parking facility.
B. The XV-2020 Exit Verifier is activated by the insertion of a system barcode ticket.
C. The XV-2020 Exit Verifier accepts one ticket from each exiting parking patron at the automated exit lane.
D. Each exit ticket may be fully preprinted with general facility location and serial number.

III. Physical Description:
A. The **EPS** Model XV-2020 Exit Verifier's overall dimensions are 15" wide, by 20" deep, by 45" in height. It weighs 95 pounds without ticket roll.
B. The electrical power requirements for the Ticket Dispenser are 115VAC at 60Hz, or 220VAC at 50Hz. An internal UL approved step-down transformer converts this current into the 24VDC required to power all of the electrical circuitry within the device.
C. Each Exit Verifier is equipped with an internal back-up battery to provide continued service even in the event of a general power outage.
D. The Model XV-2020 Exit Verifier contains a micro-processor controlled mechanism which includes a date/time clock calendar. This microprocessor may be programmed with its operating parameters remotely via available RS-232 communications connection.

E. The Model XV-2020 Exit Verifier is constructed of heavy duty rolled steel, which is zinc plated for rust inhibition, and then powder coated with sealing rust resistant paint. The standard color is white, but the device may be ordered with special paint colors.

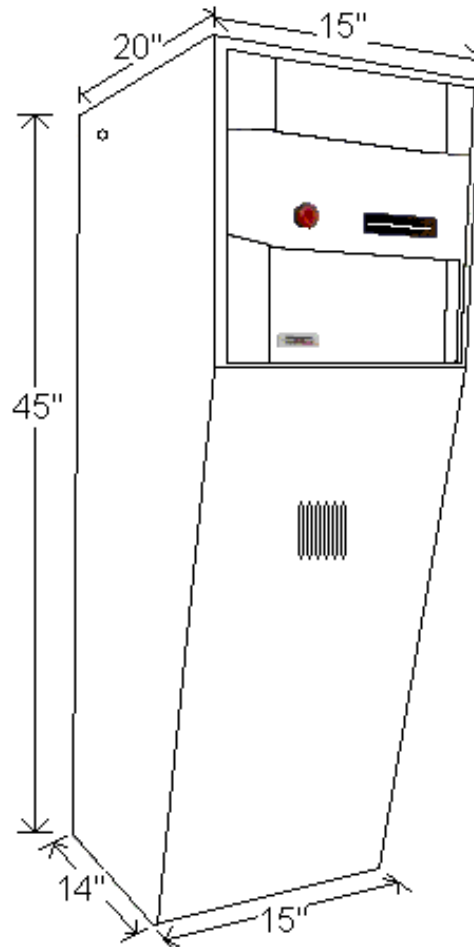

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



ENGINEERED PARKING SYSTEMS

25010 AVENUE TIBBITTS, VALENCIA, CA 91355
PHONE (661) 294-0778 (800) EPSINFO (377-4636) FAX (661) 294-0674
www.epsinfo.com